


ACCOSATO

CNC MADE OIL TANK



Warning: use only DOT 4 oil

In order to obtain a hermetic closure of the tank, lubricate the parts indicated in the figure with a thin layer of grease (attention: greases without graphite)

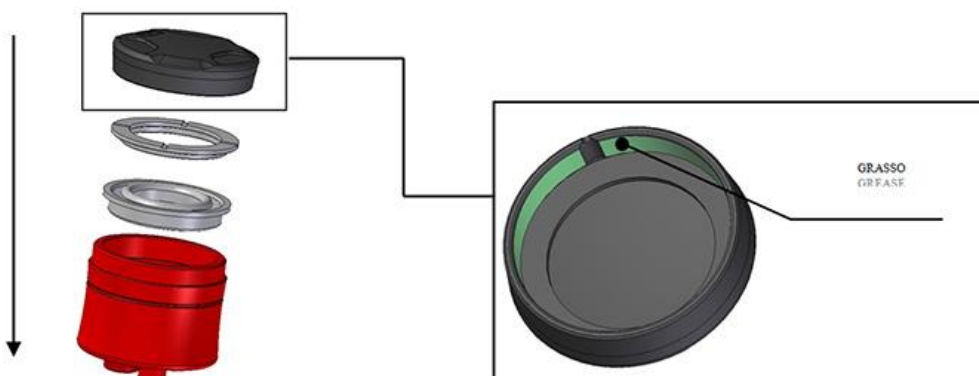

Periodically check the oil level, after the first filling, in order to avoid liquid leaks (excessive level) or system inefficiencies (insufficient level).

